



QBit 7

Experience the Ultra-Mobility

CHISON
Value Beyond Imaging

WWW.CHISON.COM



Ergonomics

19" LED
90° Foldable



±90° Horizontal rotation
Maximize visual angles

Stereo audio system

Flexible floating control panel
±45° horizontal rotation
0-15cm elevation

Backlit keys



6 USB ports




Smart **Standby Mode**

- Smart backstage management enables extended battery life
- Instant power-on



Front-facing paper exit


Detachable dust filter for easy maintenance




Built-in battery upto 80min battery life (optional)

4 casters with breaks

35.6 cm
Compact footprint

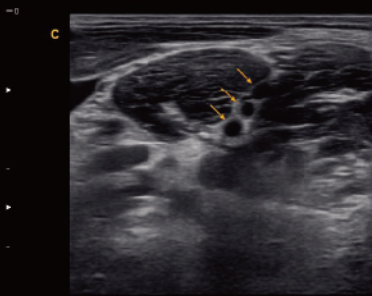


Brachial Plexus, B Mode

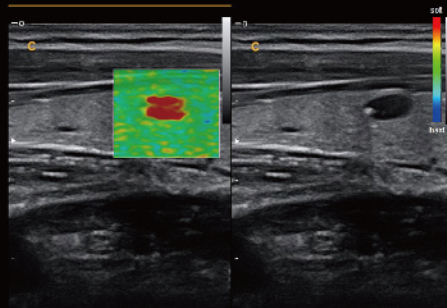

Elastography




Kindey, PD Mode

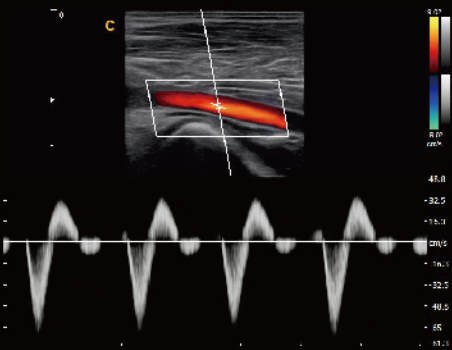

Femoral Artery, PW Mode




Fetal Heart, B Mode

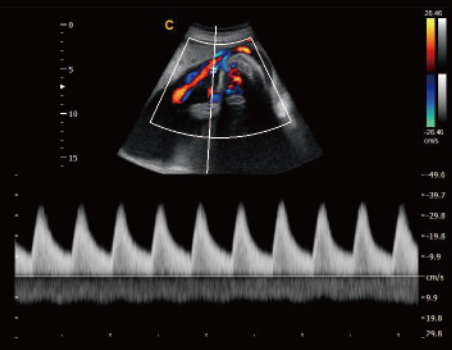


Umbilical Cord, PW Mode



Fetal Body, 4D Mode




Fetal Face, Virtual HD




Fetal Hand, Depth View

Advanced Technologies




Q-beam

- Compared to the traditional dual-beam former on most ultrasound machines, the QBit uses quad-beam technology for ultrasound signal receiving.
- Doubles the volume of signals received over traditional methods, increasing image resolution and generating more accurate images.
- Produces higher frame rates, ensuring better diagnostic confidence and efficiency, especially for moving organs.

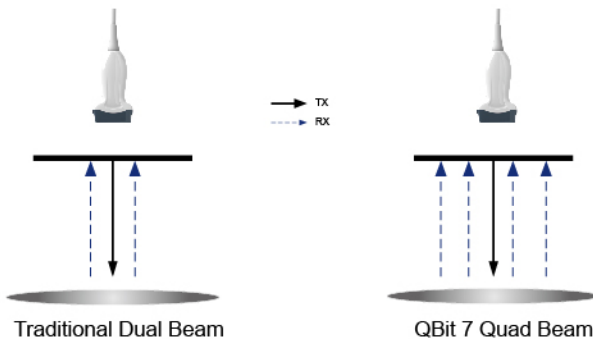

FHI

- FHI is an innovative harmonic imaging technology that uses multiple transmission and receiving methods based on the patients' size and weight. This allows the QBit to maintain image resolution when imaging larger patients.
- Traditional Tissue Harmonics and Phased Harmonics compromise image quality and resolution when penetration is increased.
- Chison's FHI technology greatly improves diagnostic abilities and clinical confidence in larger, difficult-to-image patients.

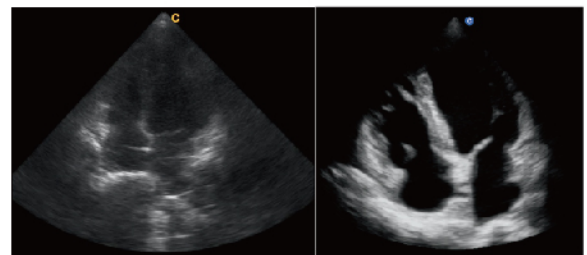


FHI OFF

FHI ON

X-contrast

- The QBit allows one-touch user-adjusted contrast resolution based upon differences in tissue density.
- Enhance, Normal, and Suppress settings increase or decrease contrast resolution, based on the tissue type and user preference.

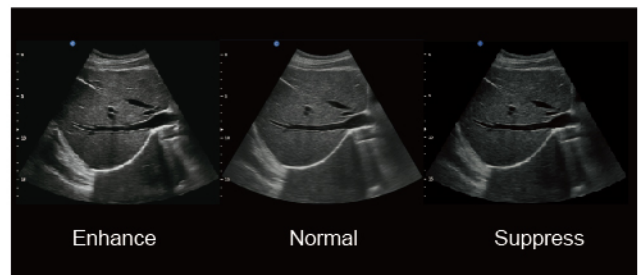


Enhance

Normal

Suppress

Q-flow


- This adaptive color detection technology can automatically adjust the assessment of color signal and noise according to different tissues.
- As a result, color sensitivity of low-velocity flow is significantly enhanced.

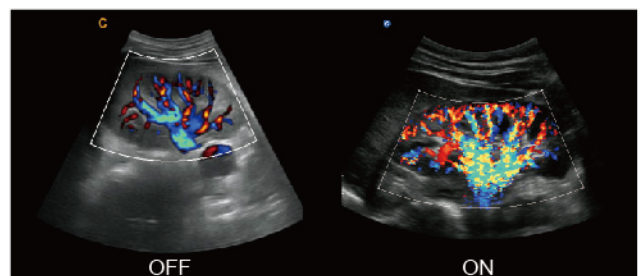


OFF

ON


Cardiology Performance

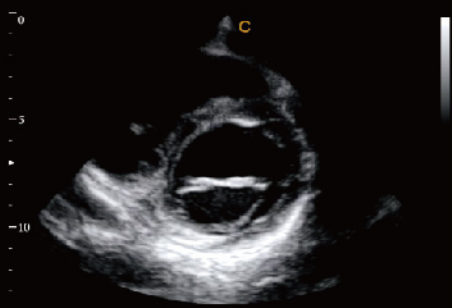


MV Short Axis View, B Mode

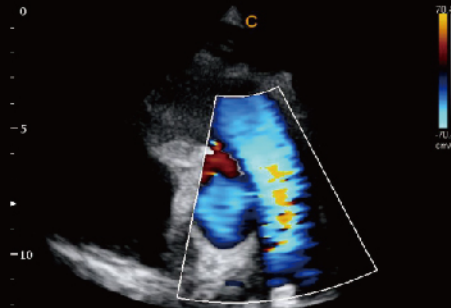


Aorta Short Axis View, C Mode

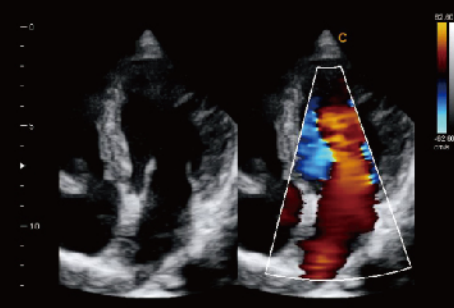


MV Regurgitation, B/BC Mode

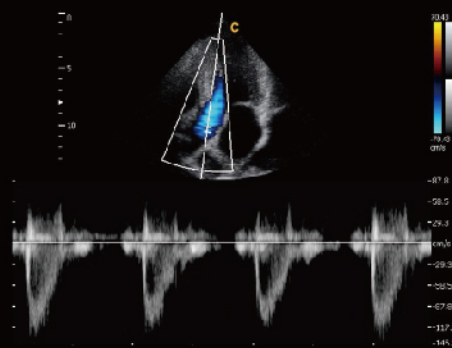


Aorta Valve, PW Mode

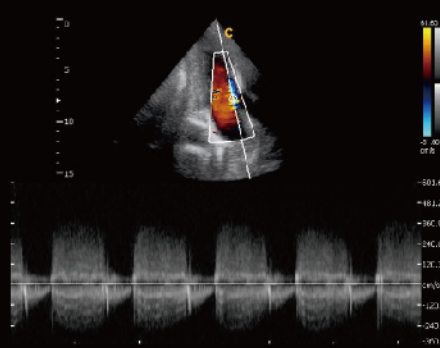


Cardiac Two Chambers, CW Mode

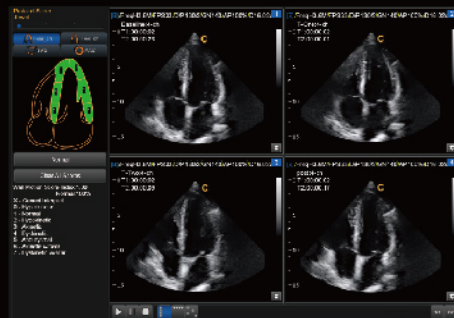


StressEcho

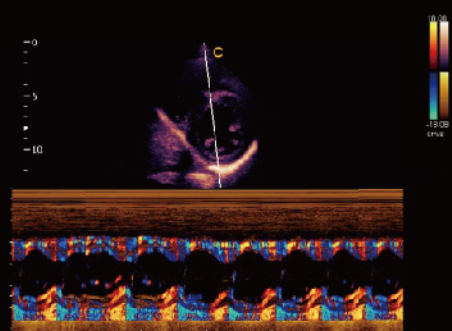

Papillary Muscles, TDI M Mode

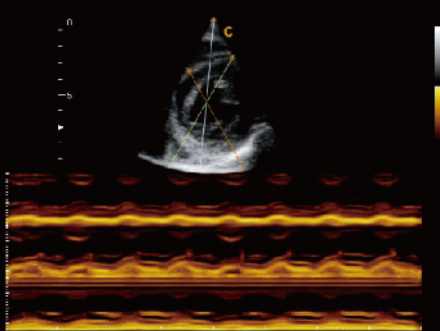

MV Short Axis View, Free M Mode

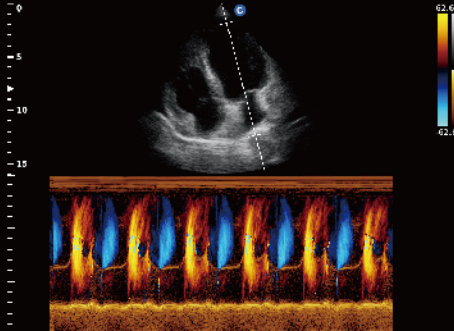

Apical Four Chambers, Color M Mode

Specifications

Imaging Modes

- . B, 2B, 4B, B/M, M
- . CFM, B/BC
- . PW/CW
- . PD, Directional PD
- . Duplex, Instant Triplex, Quadplex
- . Trapezoidal Imaging
- . Curved Panoramic Imaging (optional)
- . 2D Steer (optional)
- . Chroma B/M/PW/CW
- . 4D (optional)
- . Virtual HD/Depth View (optional)
- . Steer M, Color M, TDI (optional)
- . StressEcho (optional)
- . ECG (optional)

Professional Clinical Applications

- . ABD
- . OB / GYN
- . Vascular
- . MSK
- . Small Parts
- . Urology
- . Pediatrics
- . Cardiac

Image Processing Technologies

- . Speckle Reduction Algorithm (SRA)
- . Multiple Compound Imaging (MCI)
- . Q-image
- . Q-flow
- . X-contrast
- . Q-beam
- . FHI
- . Super Needle



2.0MHz-6.8MHz Convex
D3C60L



4.0MHz-15.0MHz Linear
D7L40L



7.0MHz-18.0MHz(With FHI) Linear
D12L40L



4.0MHz-12.0MHz Transvaginal
D6C12L



4.0MHz-15.0MHz Transvaginal
D7C10L



4.0MHz-15.0MHz Trans-Rectal
D7L40L-REC



2.0MHz-6.8MHz Micro-Convex
D3C20L



4.0MHz-10.7MHz Micro-Convex
D5C20L




2.0MHz-6.8MHz Volume
V4C40L



1.5MHz-5.3MHz Phased array
D3P64L



2.0MHz-8.0MHz Phased array
D6P64L



4.0MHz-12.0MHz Micro-Convex
D6C15L

CHISON Medical Technologies Co., Ltd.

Sales & Service Contact Address:

No.9, Xinhuihuan Road, Xinwu District, Wuxi, Jiangsu, China 214028

TEL : 0086-510-85310593 / 85310937

FAX : 0086-510-85310726

EMAIL : export@chison.com.cn

We reserve the right to make changes to this catalogue without prior notice
Please contact our local dealer for the latest information.

QBit 7-20180403